

# PART EXTENSIONS



**PAGE 10**

## **2.1 PRODUCT OVERVIEW**

**PAGE 12**


## **2.2 PART EXTENSIONS**

- NTA27-14T
- NTA33-15
- NTA40-18.5
- NTA48-15T
- NTA50-19.5
- NTA59-17.5T
- NTA60-20
- NTA70-21
- NTA72-21.5T
- NTA80-22
- NTA100-26
- NTA120-31
- NTA150-35


# PRODUCT OVERVIEW

## PART EXTENSIONS


**NTA27-14T**




**NTA33-15**




**NTA40-18.5**




**NTA48-15T**

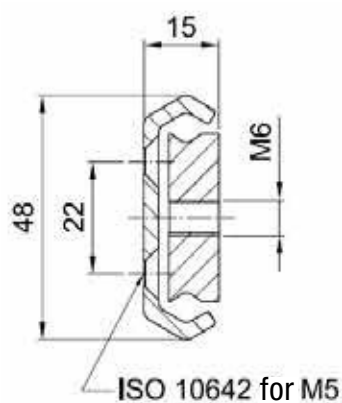


**NTA50-19.5**

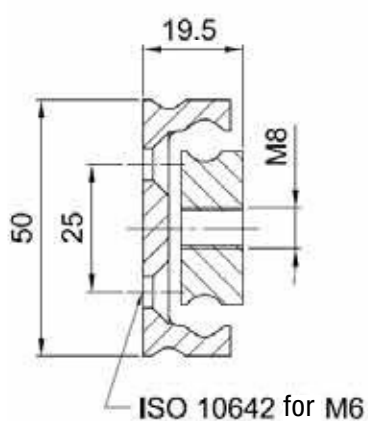


**NTA59-17.5T**

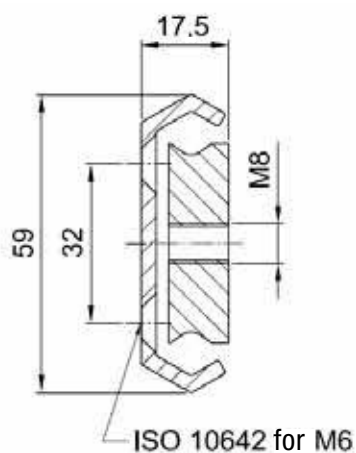


**NTA60-20**

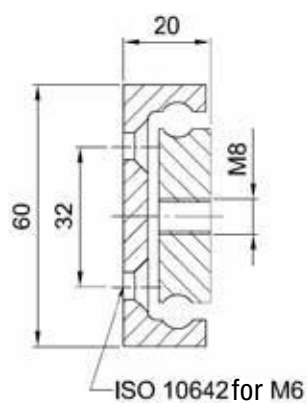

**NTA70-21**

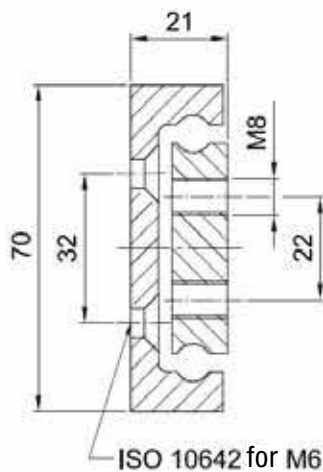


**NTA72-21.5T**

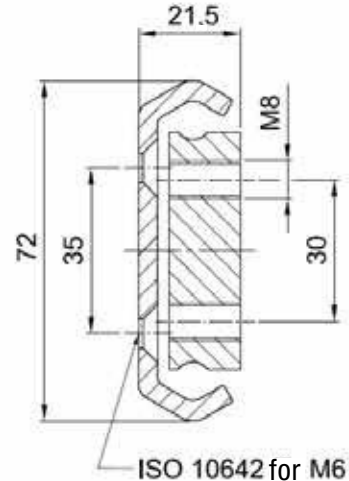


## PART EXTENSIONS


NTA80-22

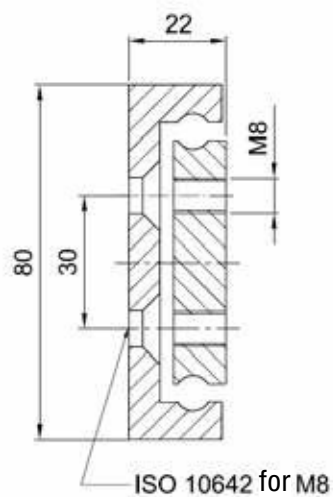


NTA100-26

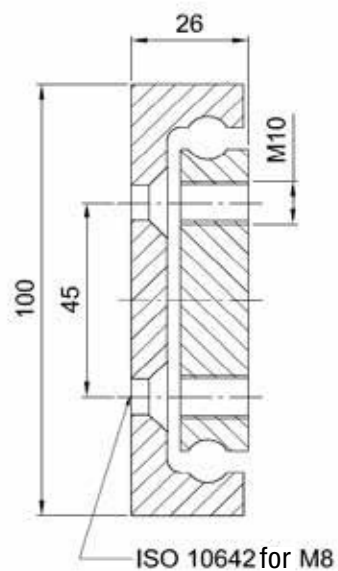

NTA120-31


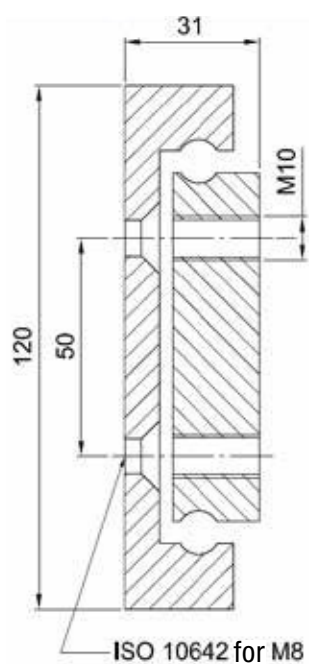


NTA150-35

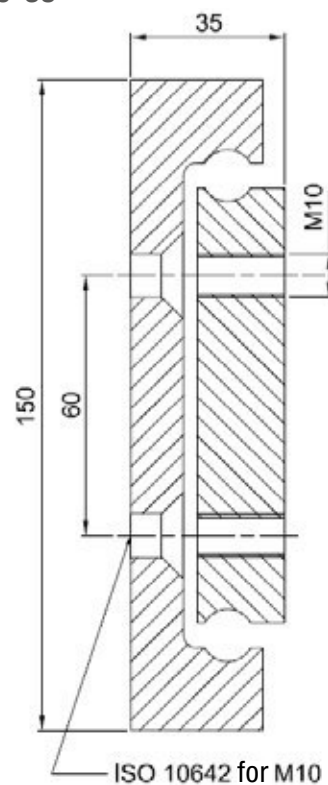

# PART EXTENSION

## NTA27-14T

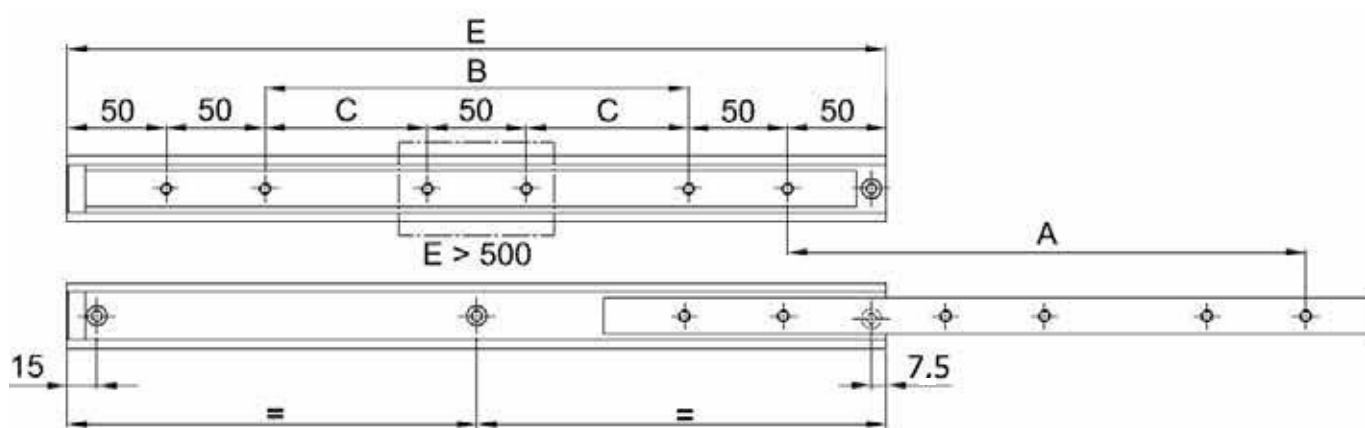
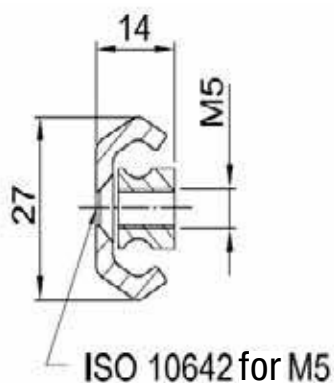


Load Table

| Order Number   | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                | B                    | C   | E                        | A                     |                 |                       |
| NTA27-14T-250  | 50                   |     | 250                      | 130                   | 0.5             | 710                   |
| NTA27-14T-300  | 100                  |     | 300                      | 180                   | 0.6             | 770                   |
| NTA27-14T-350  | 150                  |     | 350                      | 230                   | 0.7             | 770                   |
| NTA27-14T-400  | 200                  |     | 400                      | 260                   | 0.8             | 710                   |
| NTA27-14T-450  | 250                  |     | 450                      | 310                   | 0.9             | 660                   |
| NTA27-14T-500  | 300                  |     | 500                      | 340                   | 1.0             | 610                   |
| NTA27-14T-550  |                      | 150 | 550                      | 370                   | 1.1             | 560                   |
| NTA27-14T-600  |                      | 175 | 600                      | 400                   | 1.2             | 510                   |
| NTA27-14T-650  |                      | 200 | 650                      | 430                   | 1.3             | 460                   |
| NTA27-14T-700  |                      | 225 | 700                      | 460                   | 1.4             | 410                   |
| NTA27-14T-750  |                      | 250 | 750                      | 490                   | 1.5             | 360                   |
| NTA27-14T-800  |                      | 275 | 800                      | 520                   | 1.6             | 310                   |
| NTA27-14T-850  |                      | 300 | 850                      | 550                   | 1.6             | 260                   |
| NTA27-14T-900  |                      | 325 | 900                      | 600                   | 1.7             | 230                   |
| NTA27-14T-950  |                      | 350 | 950                      | 630                   | 1.8             | 210                   |
| NTA27-14T-1000 |                      | 375 | 1000                     | 660                   | 1.9             | 190                   |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA33-15

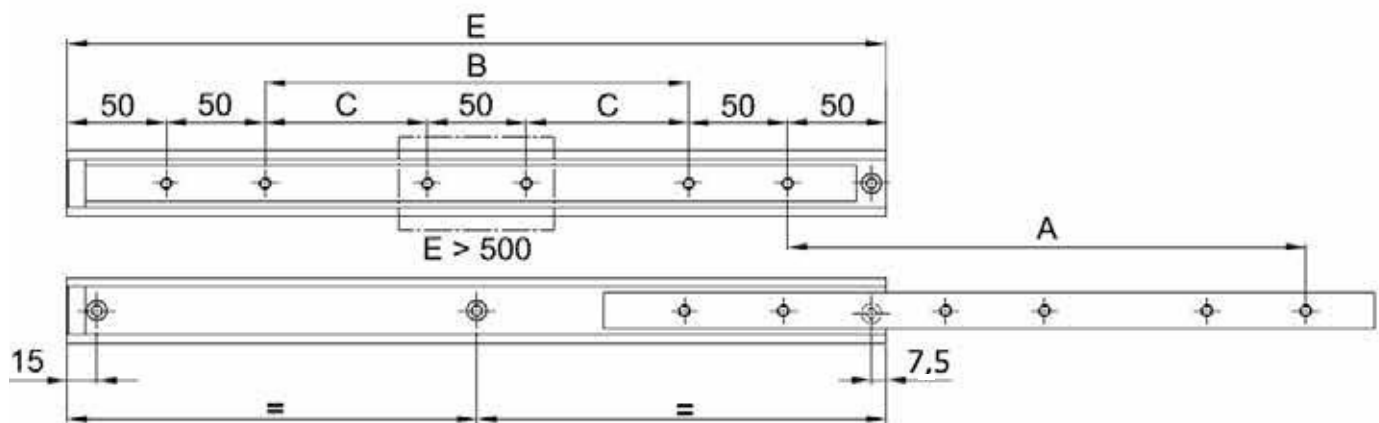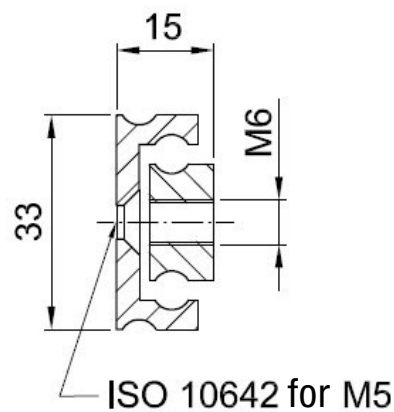



Load Table

| Order Number  | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|---------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|               | B                    | C   | E                        | A                     |                 |                       |
| NTA33-15-300  | 100                  |     | 300                      | 180                   | 0.7             | 1200                  |
| NTA33-15-350  | 150                  |     | 350                      | 230                   | 0.8             | 1150                  |
| NTA33-15-400  | 200                  |     | 400                      | 260                   | 0.9             | 1100                  |
| NTA33-15-450  | 250                  |     | 450                      | 310                   | 1.0             | 1050                  |
| NTA33-15-500  | 300                  |     | 500                      | 340                   | 1.2             | 1000                  |
| NTA33-15-550  |                      | 150 | 550                      | 370                   | 1.3             | 950                   |
| NTA33-15-600  |                      | 175 | 600                      | 400                   | 1.4             | 900                   |
| NTA33-15-650  |                      | 200 | 650                      | 430                   | 1.5             | 850                   |
| NTA33-15-700  |                      | 225 | 700                      | 460                   | 1.6             | 800                   |
| NTA33-15-750  |                      | 250 | 750                      | 490                   | 1.7             | 750                   |
| NTA33-15-800  |                      | 275 | 800                      | 520                   | 1.9             | 700                   |
| NTA33-15-850  |                      | 300 | 850                      | 550                   | 2.0             | 650                   |
| NTA33-15-900  |                      | 325 | 900                      | 600                   | 2.1             | 600                   |
| NTA33-15-950  |                      | 350 | 950                      | 630                   | 2.2             | 550                   |
| NTA33-15-1000 |                      | 375 | 1000                     | 660                   | 2.4             | 500                   |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION



## NTA40-18.5

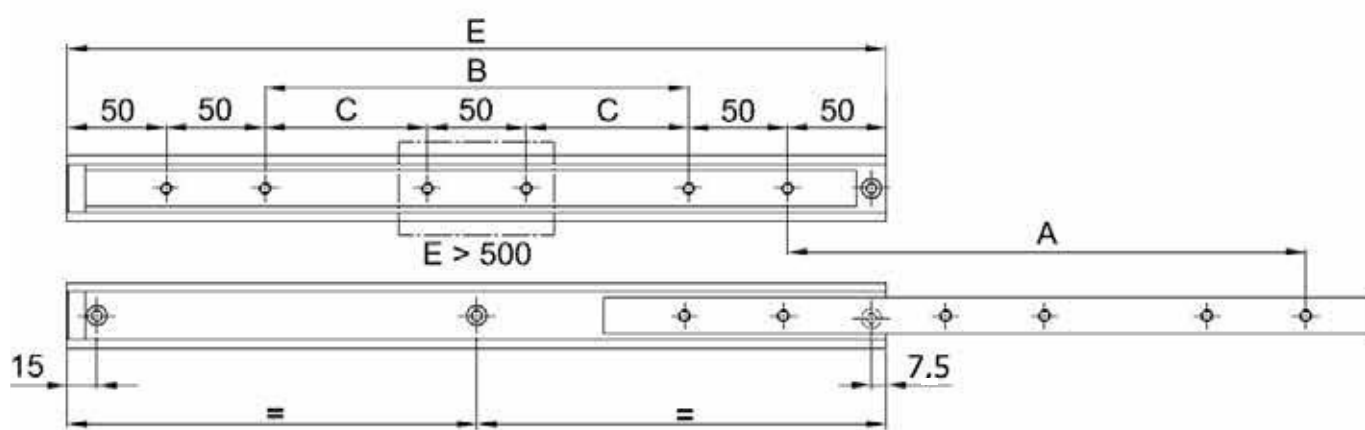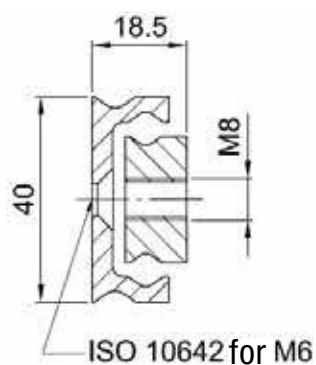

| Order Number    | Load Table           |     |                          |                       |                 | Maximum load/pair (N) |
|-----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                 | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) |                       |
|                 | B                    | C   | E                        | A                     |                 |                       |
| NTA40-18.5-300  | 100                  |     | 300                      | 180                   | 1.3             | 2000                  |
| NTA40-18.5-350  | 150                  |     | 350                      | 230                   | 1.5             | 2350                  |
| NTA40-18.5-400  | 200                  |     | 400                      | 260                   | 1.7             | 2450                  |
| NTA40-18.5-450  | 250                  |     | 450                      | 310                   | 1.9             | 2550                  |
| NTA40-18.5-500  | 300                  |     | 500                      | 340                   | 2.2             | 2500                  |
| NTA40-18.5-550  |                      | 150 | 550                      | 370                   | 2.4             | 2450                  |
| NTA40-18.5-600  |                      | 175 | 600                      | 400                   | 2.6             | 2400                  |
| NTA40-18.5-650  |                      | 200 | 650                      | 430                   | 2.8             | 2350                  |
| NTA40-18.5-700  |                      | 225 | 700                      | 460                   | 3.0             | 2300                  |
| NTA40-18.5-750  |                      | 250 | 750                      | 490                   | 3.2             | 2250                  |
| NTA40-18.5-800  |                      | 275 | 800                      | 520                   | 3.5             | 2150                  |
| NTA40-18.5-850  |                      | 300 | 850                      | 550                   | 3.7             | 2050                  |
| NTA40-18.5-900  |                      | 325 | 900                      | 600                   | 3.9             | 1950                  |
| NTA40-18.5-950  |                      | 350 | 950                      | 630                   | 4.1             | 1800                  |
| NTA40-18.5-1000 |                      | 375 | 1000                     | 660                   | 4.3             | 1700                  |
| NTA40-18.5-1100 |                      | 425 | 1100                     | 720                   | 4.7             | 1600                  |
| NTA40-18.5-1200 |                      | 475 | 1200                     | 800                   | 5.1             | 1500                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA48-15T

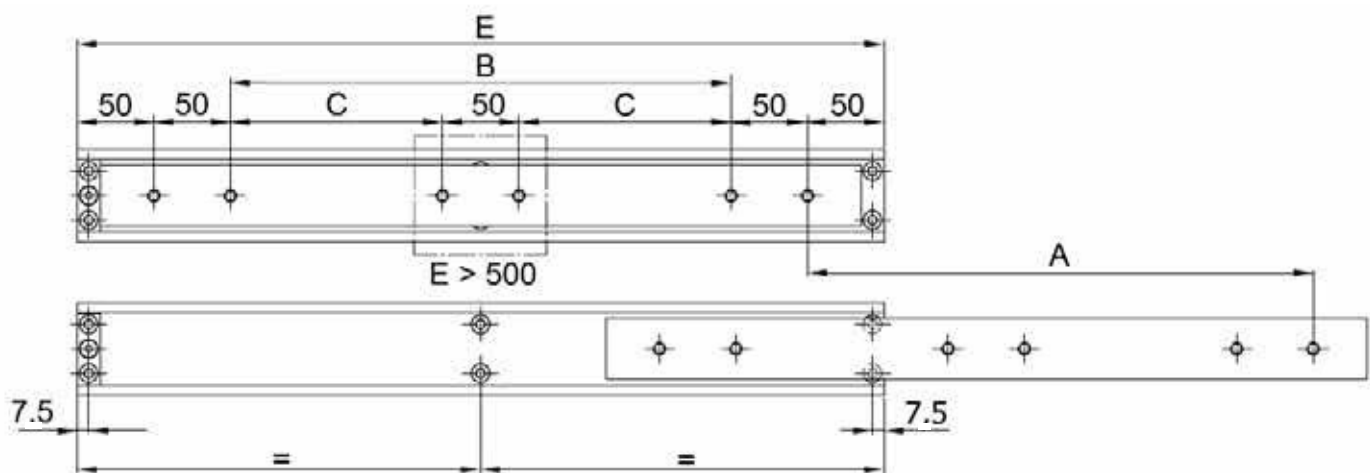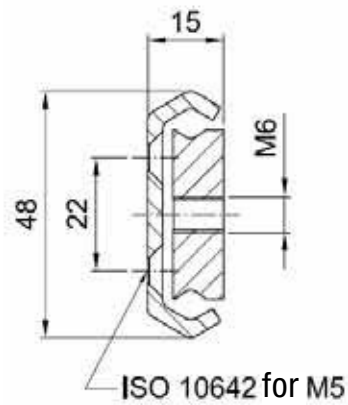



Load Table

| Order Number   | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                | B                    | C   | E                        | A                     |                 |                       |
| NTA48-15T-300  | 100                  |     | 300                      | 180                   | 1.0             | 1550                  |
| NTA48-15T-350  | 150                  |     | 350                      | 230                   | 1.2             | 1650                  |
| NTA48-15T-400  | 200                  |     | 400                      | 260                   | 1.4             | 1750                  |
| NTA48-15T-450  | 250                  |     | 450                      | 310                   | 1.6             | 1850                  |
| NTA48-15T-500  | 300                  |     | 500                      | 340                   | 1.8             | 1800                  |
| NTA48-15T-550  |                      | 150 | 550                      | 370                   | 1.9             | 1750                  |
| NTA48-15T-600  |                      | 175 | 600                      | 400                   | 2.1             | 1700                  |
| NTA48-15T-650  |                      | 200 | 650                      | 430                   | 2.2             | 1650                  |
| NTA48-15T-700  |                      | 225 | 700                      | 460                   | 2.4             | 1600                  |
| NTA48-15T-750  |                      | 250 | 750                      | 490                   | 2.6             | 1500                  |
| NTA48-15T-800  |                      | 275 | 800                      | 520                   | 2.7             | 1400                  |
| NTA48-15T-850  |                      | 300 | 850                      | 550                   | 2.9             | 1300                  |
| NTA48-15T-900  |                      | 325 | 900                      | 600                   | 3.1             | 1200                  |
| NTA48-15T-950  |                      | 350 | 950                      | 630                   | 3.3             | 1100                  |
| NTA48-15T-1000 |                      | 375 | 1000                     | 660                   | 3.5             | 1000                  |
| NTA48-15T-1100 |                      | 425 | 1100                     | 720                   | 3.7             | 800                   |
| NTA48-15T-1200 |                      | 475 | 1200                     | 800                   | 4.1             | 600                   |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION

## NTA50-19.5

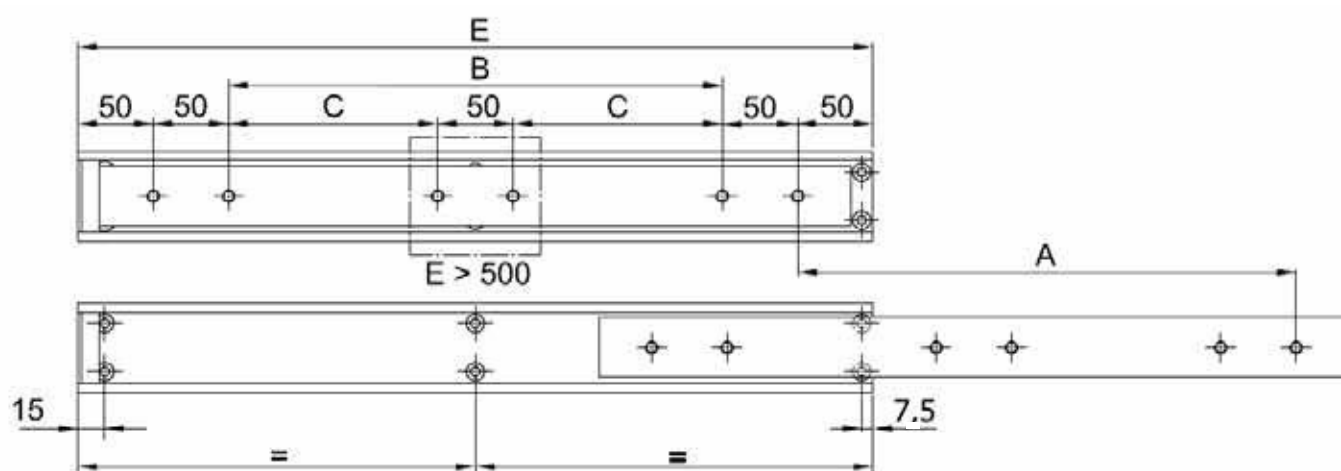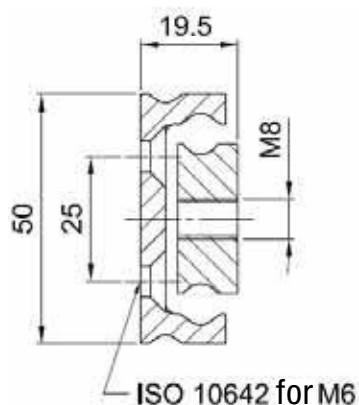


Load Table

| Order Number    | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|-----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                 | B                    | C   | E                        | A                     |                 |                       |
| NTA50-19.5-300  | 100                  |     | 300                      | 180                   | 1.7             | 2400                  |
| NTA50-19.5-350  | 150                  |     | 350                      | 230                   | 2.0             | 2600                  |
| NTA50-19.5-400  | 200                  |     | 400                      | 260                   | 2.2             | 2700                  |
| NTA50-19.5-450  | 250                  |     | 450                      | 310                   | 2.5             | 2800                  |
| NTA50-19.5-500  | 300                  |     | 500                      | 340                   | 2.8             | 2900                  |
| NTA50-19.5-550  |                      | 150 | 550                      | 370                   | 3.1             | 2850                  |
| NTA50-19.5-600  |                      | 175 | 600                      | 400                   | 3.4             | 2800                  |
| NTA50-19.5-650  |                      | 200 | 650                      | 430                   | 3.6             | 2700                  |
| NTA50-19.5-700  |                      | 225 | 700                      | 460                   | 3.9             | 2600                  |
| NTA50-19.5-750  |                      | 250 | 750                      | 490                   | 4.2             | 2500                  |
| NTA50-19.5-800  |                      | 275 | 800                      | 520                   | 4.5             | 2400                  |
| NTA50-19.5-850  |                      | 300 | 850                      | 550                   | 4.8             | 2300                  |
| NTA50-19.5-900  |                      | 325 | 900                      | 600                   | 5.1             | 2200                  |
| NTA50-19.5-950  |                      | 350 | 950                      | 630                   | 5.3             | 2100                  |
| NTA50-19.5-1000 |                      | 375 | 1000                     | 660                   | 5.6             | 2000                  |
| NTA50-19.5-1100 |                      | 425 | 1100                     | 720                   | 6.2             | 1850                  |
| NTA50-19.5-1200 |                      | 475 | 1200                     | 800                   | 6.7             | 1650                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA59-17.5T

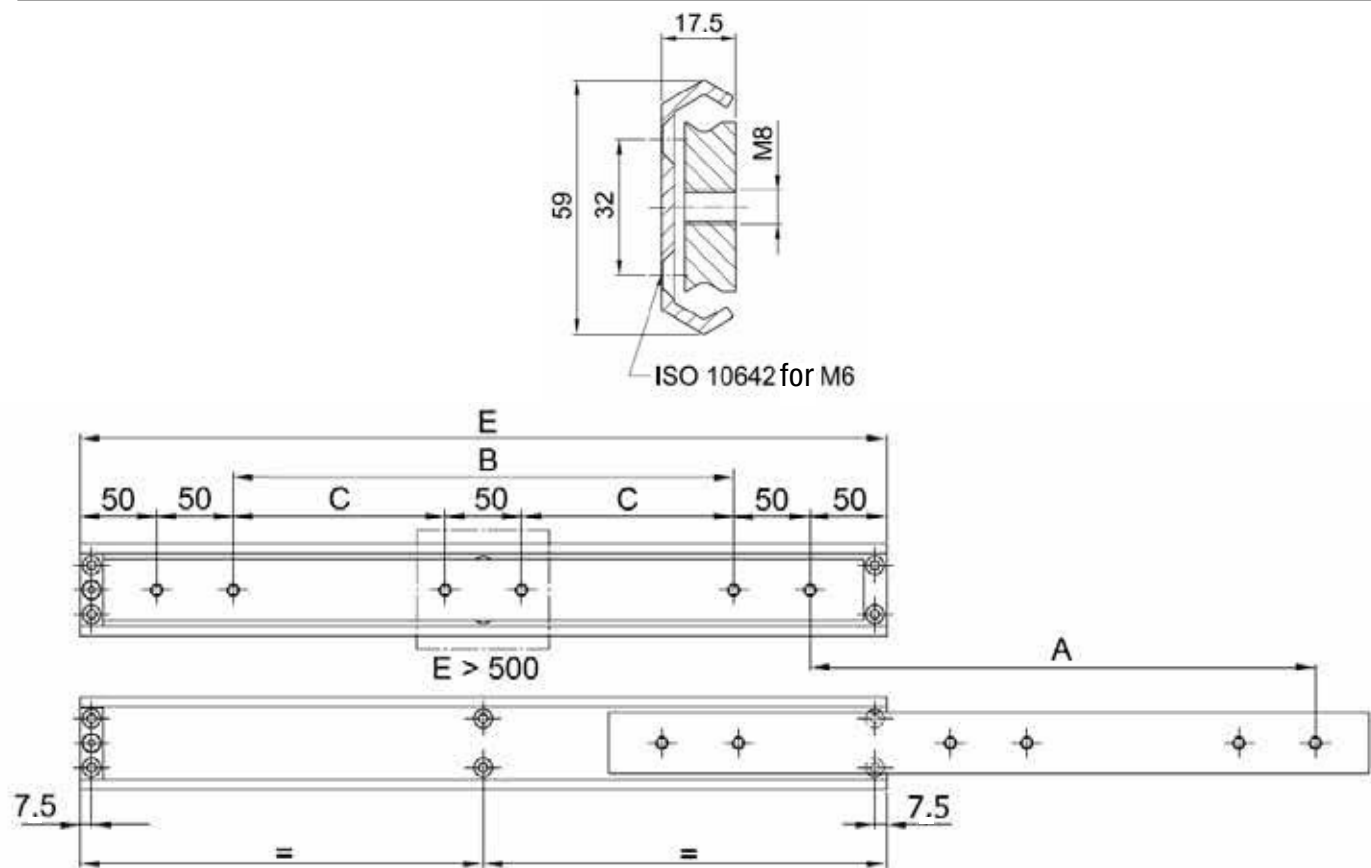


Load Table

| Order Number     | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|------------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                  | B                    | C   | E                        | A                     |                 |                       |
| NTA59-17.5T-300  | 100                  |     | 300                      | 180                   | 2.0             | 2250                  |
| NTA59-17.5T-350  | 150                  |     | 350                      | 230                   | 2.3             | 2350                  |
| NTA59-17.5T-400  | 200                  |     | 400                      | 260                   | 2.6             | 2450                  |
| NTA59-17.5T-450  | 250                  |     | 450                      | 310                   | 2.9             | 2550                  |
| NTA59-17.5T-500  | 300                  |     | 500                      | 340                   | 3.1             | 2500                  |
| NTA59-17.5T-550  |                      | 150 | 550                      | 370                   | 3.6             | 2450                  |
| NTA59-17.5T-600  |                      | 175 | 600                      | 400                   | 3.8             | 2400                  |
| NTA59-17.5T-650  |                      | 200 | 650                      | 430                   | 4.2             | 2350                  |
| NTA59-17.5T-700  |                      | 225 | 700                      | 460                   | 4.5             | 2250                  |
| NTA59-17.5T-750  |                      | 250 | 750                      | 490                   | 4.8             | 2150                  |
| NTA59-17.5T-800  |                      | 275 | 800                      | 520                   | 5.2             | 2050                  |
| NTA59-17.5T-850  |                      | 300 | 850                      | 550                   | 5.5             | 1950                  |
| NTA59-17.5T-900  |                      | 325 | 900                      | 600                   | 5.8             | 1850                  |
| NTA59-17.5T-950  |                      | 350 | 950                      | 630                   | 6.1             | 1750                  |
| NTA59-17.5T-1000 |                      | 375 | 1000                     | 660                   | 6.4             | 1650                  |
| NTA59-17.5T-1100 |                      | 425 | 1100                     | 720                   | 7.1             | 1450                  |
| NTA59-17.5T-1200 |                      | 475 | 1200                     | 800                   | 7.7             | 1200                  |
| NTA59-17.5T-1300 |                      | 525 | 1300                     | 860                   | 8.3             | 1050                  |
| NTA59-17.5T-1400 |                      | 575 | 1400                     | 920                   | 9.0             | 850                   |
| NTA59-17.5T-1500 |                      | 625 | 1500                     | 1000                  | 9.6             | 650                   |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION


## NTA60-20

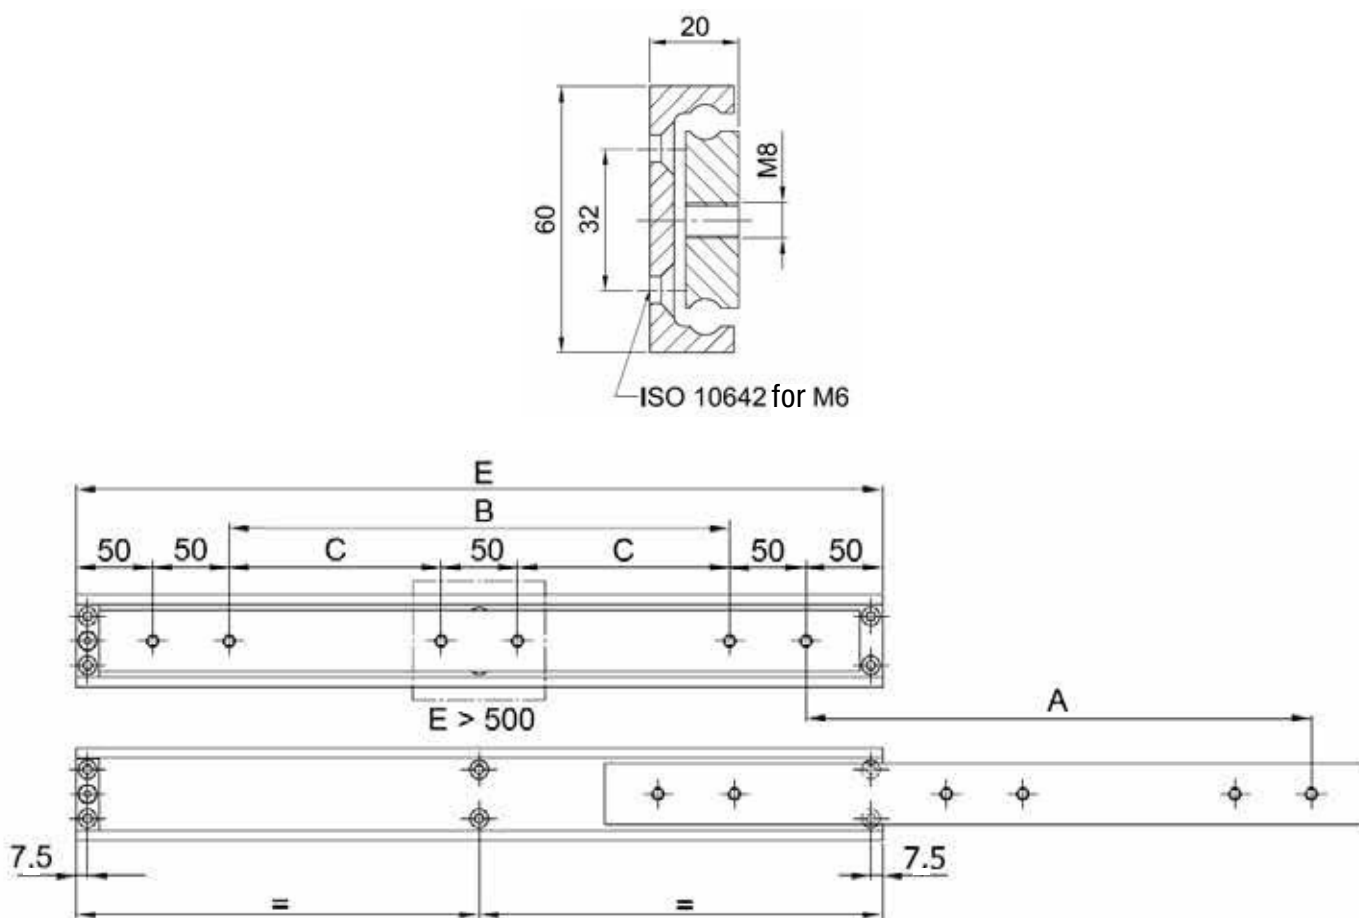

| Order Number  | Load Table           |     |                          |                       |                 | Maximum load/pair (N) |
|---------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|               | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) |                       |
|               | B                    | C   | E                        | A                     |                 |                       |
| NTA60-20-300  | 100                  |     | 300                      | 180                   | 2.3             | 3200                  |
| NTA60-20-350  | 150                  |     | 350                      | 210                   | 2.7             | 3250                  |
| NTA60-20-400  | 200                  |     | 400                      | 240                   | 3.1             | 3300                  |
| NTA60-20-450  | 250                  |     | 450                      | 270                   | 3.5             | 3350                  |
| NTA60-20-500  | 300                  |     | 500                      | 300                   | 3.9             | 3400                  |
| NTA60-20-550  |                      | 150 | 550                      | 330                   | 4.3             | 3350                  |
| NTA60-20-600  |                      | 175 | 600                      | 360                   | 4.6             | 3300                  |
| NTA60-20-650  |                      | 200 | 650                      | 390                   | 5.0             | 3250                  |
| NTA60-20-700  |                      | 225 | 700                      | 420                   | 5.4             | 3200                  |
| NTA60-20-750  |                      | 250 | 750                      | 450                   | 5.8             | 3100                  |
| NTA60-20-800  |                      | 275 | 800                      | 480                   | 6.1             | 3000                  |
| NTA60-20-850  |                      | 300 | 850                      | 510                   | 6.5             | 2900                  |
| NTA60-20-900  |                      | 325 | 900                      | 540                   | 6.9             | 2800                  |
| NTA60-20-950  |                      | 350 | 950                      | 570                   | 7.3             | 2700                  |
| NTA60-20-1000 |                      | 375 | 1000                     | 600                   | 7.7             | 2600                  |
| NTA60-20-1100 |                      | 425 | 1100                     | 660                   | 8.5             | 2450                  |
| NTA60-20-1200 |                      | 475 | 1200                     | 720                   | 9.2             | 2250                  |
| NTA60-20-1300 |                      | 525 | 1300                     | 780                   | 10.0            | 2050                  |
| NTA60-20-1400 |                      | 575 | 1400                     | 840                   | 10.8            | 1900                  |
| NTA60-20-1500 |                      | 625 | 1500                     | 900                   | 11.6            | 1700                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA70-21

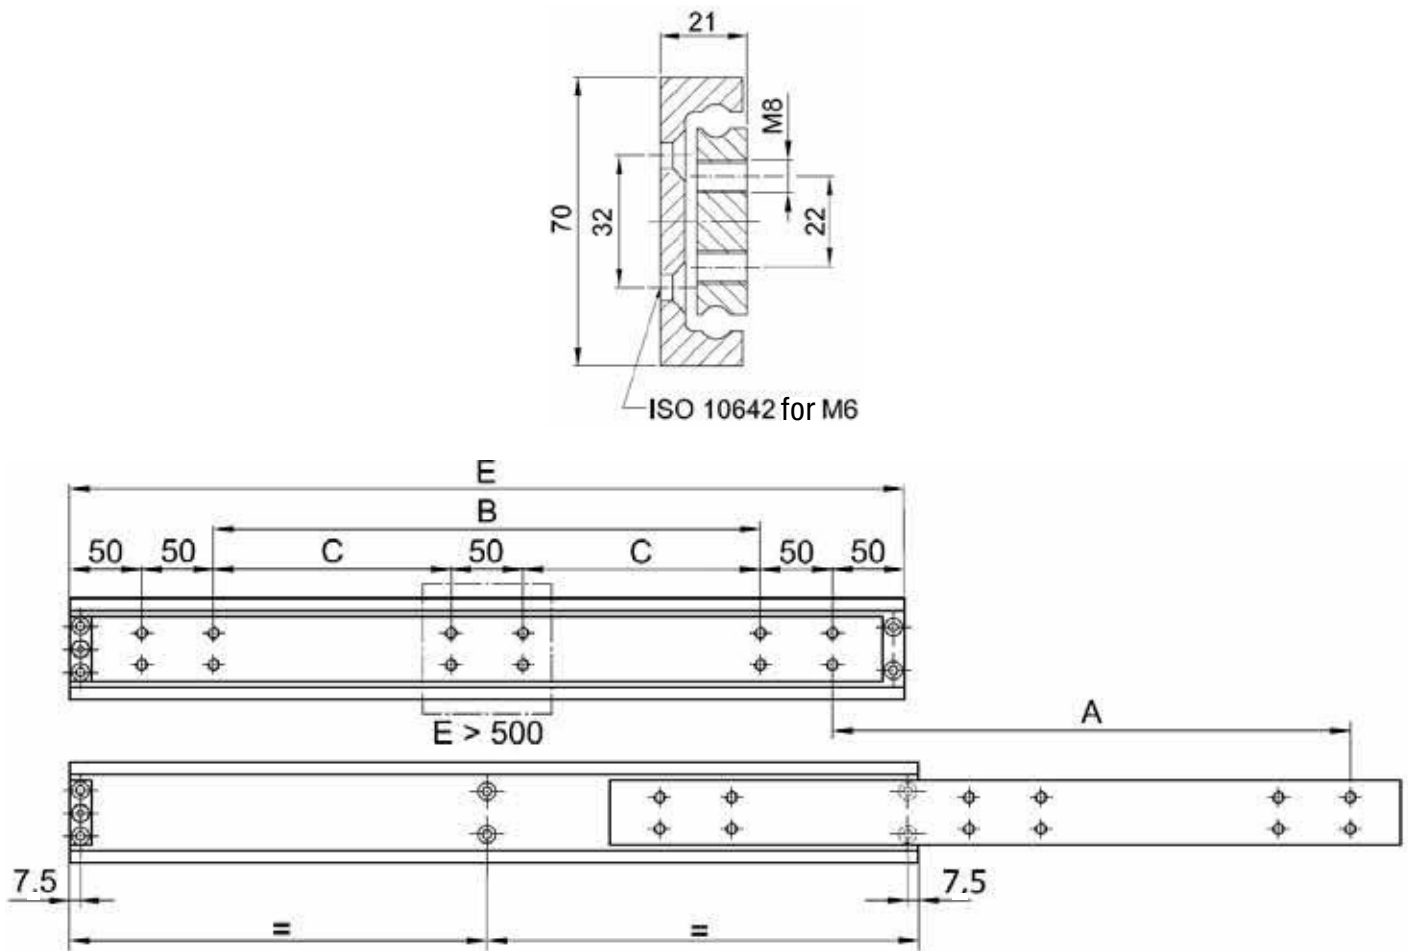



Load Table

| Order Number  | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|---------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|               | B                    | C   |                          |                       |                 |                       |
| NTA70-21-500  | 300                  |     | 500                      | 300                   | 4.5             | 4200                  |
| NTA70-21-550  |                      | 150 | 550                      | 330                   | 5.0             | 4150                  |
| NTA70-21-600  |                      | 175 | 600                      | 360                   | 5.5             | 4100                  |
| NTA70-21-650  |                      | 200 | 650                      | 390                   | 6.0             | 4050                  |
| NTA70-21-700  |                      | 225 | 700                      | 420                   | 6.5             | 4000                  |
| NTA70-21-750  |                      | 250 | 750                      | 450                   | 6.9             | 3900                  |
| NTA70-21-800  |                      | 275 | 800                      | 480                   | 7.4             | 3800                  |
| NTA70-21-850  |                      | 300 | 850                      | 510                   | 7.8             | 3700                  |
| NTA70-21-900  |                      | 325 | 900                      | 540                   | 8.3             | 3600                  |
| NTA70-21-950  |                      | 350 | 950                      | 570                   | 8.8             | 3450                  |
| NTA70-21-1000 |                      | 375 | 1000                     | 600                   | 9.3             | 3300                  |
| NTA70-21-1100 |                      | 425 | 1100                     | 660                   | 10.2            | 3100                  |
| NTA70-21-1200 |                      | 475 | 1200                     | 720                   | 11.1            | 2900                  |
| NTA70-21-1300 |                      | 525 | 1300                     | 780                   | 12.0            | 2700                  |
| NTA70-21-1400 |                      | 575 | 1400                     | 840                   | 12.9            | 2400                  |
| NTA70-21-1500 |                      | 625 | 1500                     | 900                   | 13.9            | 2100                  |
| NTA70-21-1600 |                      | 675 | 1600                     | 960                   | 14.8            | 1800                  |
| NTA70-21-1700 |                      | 725 | 1700                     | 1020                  | 15.7            | 1500                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION

## NTA72-21.5T

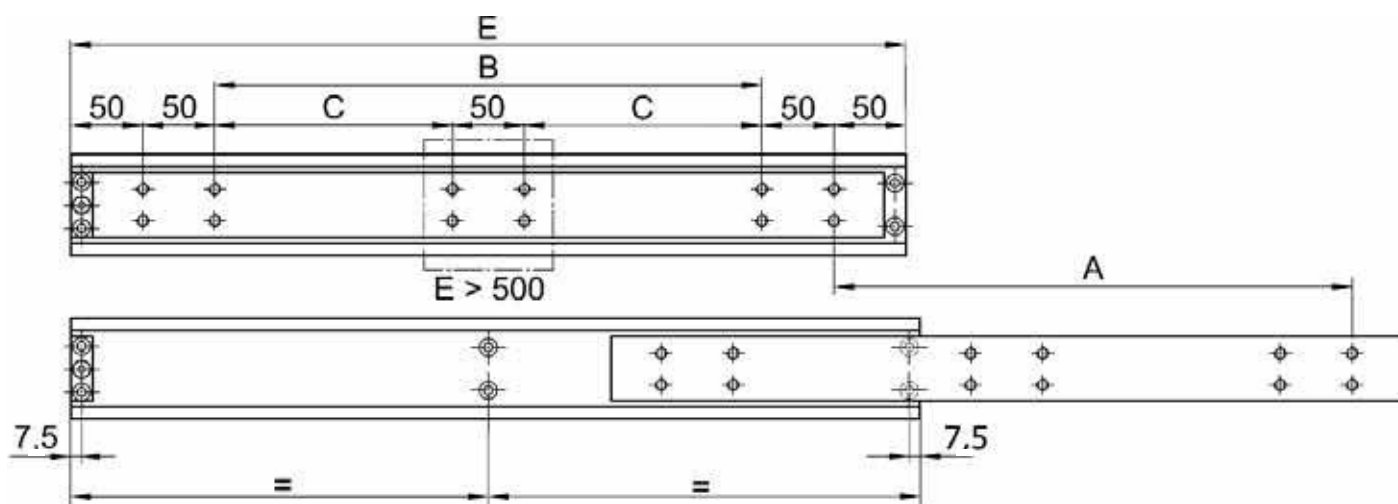
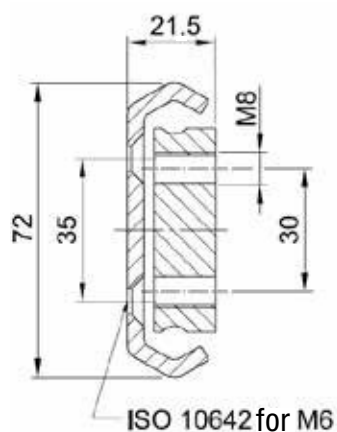


Load Table

| Order Number     | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|------------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                  | B                    | C   | E                        | A                     |                 |                       |
| NTA72-21.5T-400  | 200                  |     | 400                      | 240                   | 3.2             | 2850                  |
| NTA72-21.5T-450  | 250                  |     | 450                      | 270                   | 3.6             | 3000                  |
| NTA72-21.5T-500  | 300                  |     | 500                      | 300                   | 4.0             | 2950                  |
| NTA72-21.5T-550  |                      | 150 | 550                      | 330                   | 4.5             | 3050                  |
| NTA72-21.5T-600  |                      | 175 | 600                      | 360                   | 4.9             | 3000                  |
| NTA72-21.5T-650  |                      | 200 | 650                      | 390                   | 5.2             | 2950                  |
| NTA72-21.5T-700  |                      | 225 | 700                      | 420                   | 5.6             | 2900                  |
| NTA72-21.5T-750  |                      | 250 | 750                      | 450                   | 6.0             | 2850                  |
| NTA72-21.5T-800  |                      | 275 | 800                      | 480                   | 6.3             | 2800                  |
| NTA72-21.5T-850  |                      | 300 | 850                      | 510                   | 6.8             | 2750                  |
| NTA72-21.5T-900  |                      | 325 | 900                      | 540                   | 7.2             | 2700                  |
| NTA72-21.5T-950  |                      | 350 | 950                      | 570                   | 7.8             | 2650                  |
| NTA72-21.5T-1000 |                      | 375 | 1000                     | 600                   | 8.0             | 2550                  |
| NTA72-21.5T-1100 |                      | 425 | 1100                     | 660                   | 8.8             | 2300                  |
| NTA72-21.5T-1200 |                      | 475 | 1200                     | 720                   | 9.6             | 2050                  |
| NTA72-21.5T-1300 |                      | 525 | 1300                     | 780                   | 10.4            | 1800                  |
| NTA72-21.5T-1400 |                      | 575 | 1400                     | 840                   | 11.2            | 1550                  |
| NTA72-21.5T-1500 |                      | 625 | 1500                     | 900                   | 12.2            | 1250                  |
| NTA72-21.5T-1600 |                      | 675 | 1600                     | 960                   | 12.8            | 950                   |
| NTA72-21.5T-1700 |                      | 725 | 1700                     | 1020                  | 13.5            | 750                   |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA80-22

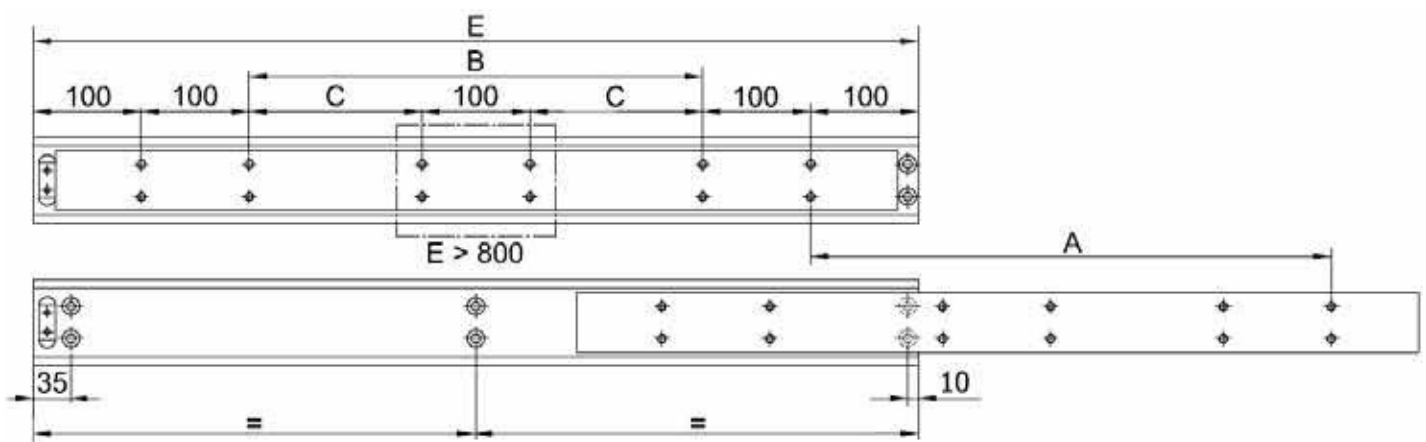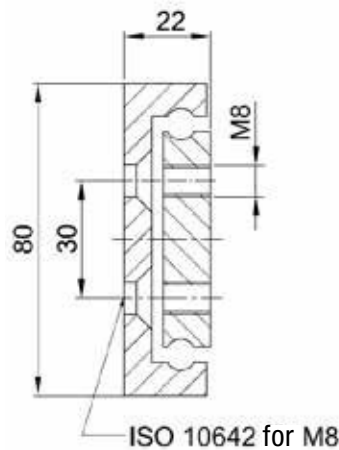



Load Table

| Order Number  | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|---------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|               | B                    | C   | E                        | A                     |                 |                       |
| NTA80-22-500  | 100                  |     | 500                      | 300                   | 5.2             | 4800                  |
| NTA80-22-550  | 150                  |     | 550                      | 330                   | 5.7             | 4900                  |
| NTA80-22-600  | 200                  |     | 600                      | 360                   | 6.2             | 5000                  |
| NTA80-22-650  | 250                  |     | 650                      | 390                   | 6.7             | 4900                  |
| NTA80-22-700  | 300                  |     | 700                      | 420                   | 7.3             | 4800                  |
| NTA80-22-750  | 350                  |     | 750                      | 450                   | 7.7             | 4700                  |
| NTA80-22-800  | 400                  |     | 800                      | 480                   | 8.3             | 4600                  |
| NTA80-22-850  |                      | 175 | 850                      | 510                   | 8.8             | 4500                  |
| NTA80-22-900  |                      | 200 | 900                      | 540                   | 9.3             | 4400                  |
| NTA80-22-950  |                      | 225 | 950                      | 570                   | 9.8             | 4250                  |
| NTA80-22-1000 |                      | 250 | 1000                     | 600                   | 10.4            | 4100                  |
| NTA80-22-1100 |                      | 300 | 1100                     | 660                   | 11.4            | 3800                  |
| NTA80-22-1200 |                      | 350 | 1200                     | 720                   | 12.4            | 3500                  |
| NTA80-22-1300 |                      | 400 | 1300                     | 780                   | 13.5            | 3200                  |
| NTA80-22-1400 |                      | 450 | 1400                     | 840                   | 14.5            | 2900                  |
| NTA80-22-1500 |                      | 500 | 1500                     | 900                   | 15.6            | 2600                  |
| NTA80-22-1600 |                      | 550 | 1600                     | 960                   | 16.6            | 2300                  |
| NTA80-22-1700 |                      | 600 | 1700                     | 1020                  | 17.7            | 2000                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION

## NTA100-26

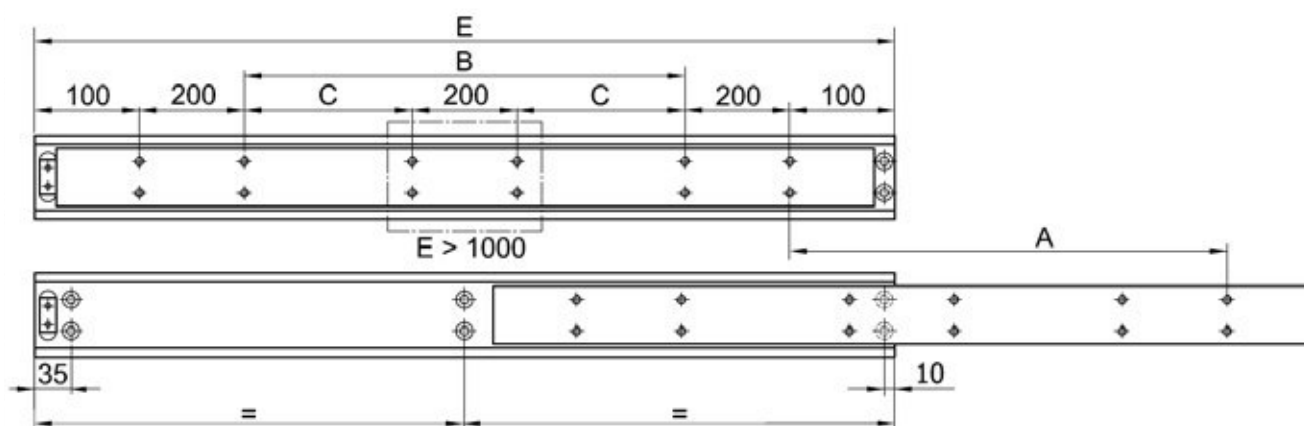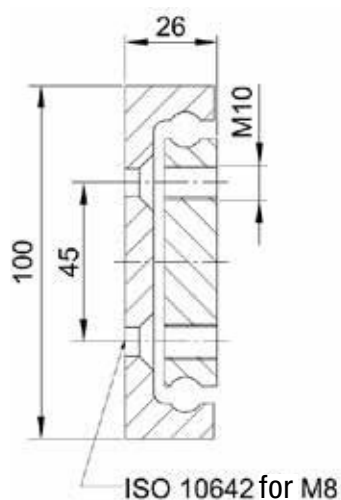


Load Table

| Order Number   | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                | B                    | C   | E                        | A                     |                 |                       |
| NTA100-26-700  | 100                  |     | 700                      | 420                   | 12.0            | 9000                  |
| NTA100-26-750  | 150                  |     | 750                      | 450                   | 12.8            | 9500                  |
| NTA100-26-800  | 200                  |     | 800                      | 480                   | 13.6            | 10000                 |
| NTA100-26-850  | 250                  |     | 850                      | 510                   | 14.0            | 9750                  |
| NTA100-26-900  | 300                  |     | 900                      | 540                   | 15.4            | 9500                  |
| NTA100-26-950  | 350                  |     | 950                      | 570                   | 16.2            | 9250                  |
| NTA100-26-1000 | 400                  |     | 1000                     | 600                   | 17.0            | 9000                  |
| NTA100-26-1100 |                      | 150 | 1100                     | 660                   | 18.7            | 8500                  |
| NTA100-26-1200 |                      | 200 | 1200                     | 720                   | 20.4            | 8000                  |
| NTA100-26-1300 |                      | 250 | 1300                     | 780                   | 22.1            | 7500                  |
| NTA100-26-1400 |                      | 300 | 1400                     | 840                   | 27.8            | 6900                  |
| NTA100-26-1500 |                      | 350 | 1500                     | 900                   | 25.5            | 6300                  |
| NTA100-26-1600 |                      | 400 | 1600                     | 960                   | 27.2            | 5700                  |
| NTA100-26-1700 |                      | 450 | 1700                     | 1020                  | 28.9            | 5100                  |
| NTA100-26-1800 |                      | 500 | 1800                     | 1080                  | 30.6            | 4500                  |
| NTA100-26-1900 |                      | 550 | 1900                     | 1140                  | 32.3            | 3900                  |
| NTA100-26-2000 |                      | 600 | 2000                     | 1200                  | 34.0            | 3300                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

## NTA120-31

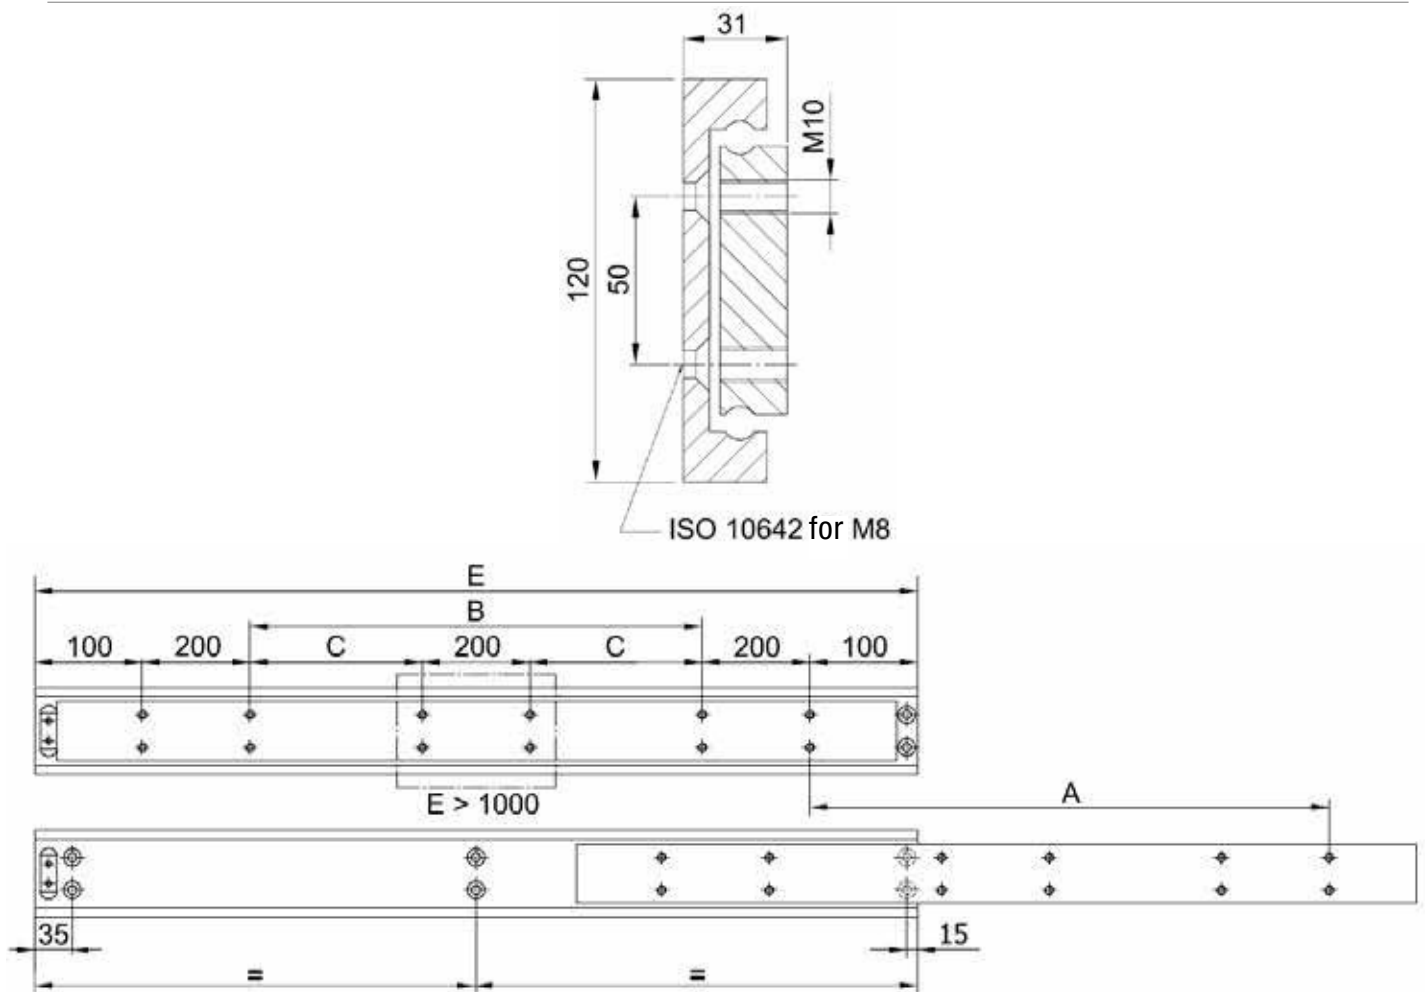



Load Table

| Order Number   | Hole separation<br>(mm) |     | Installation length<br>(mm) | Extension length<br>(mm) | Net weight<br>(kg) | Maximum load/pair<br>(N) |
|----------------|-------------------------|-----|-----------------------------|--------------------------|--------------------|--------------------------|
|                | B                       | C   |                             |                          |                    |                          |
| NTA120-31-700  | 100                     |     | 700                         | 420                      | 16.6               | 11500                    |
| NTA120-31-750  | 150                     |     | 750                         | 450                      | 17.8               | 12000                    |
| NTA120-31-800  | 200                     |     | 800                         | 480                      | 19.0               | 12000                    |
| NTA120-31-850  | 250                     |     | 850                         | 510                      | 20.2               | 12000                    |
| NTA120-31-900  | 300                     |     | 900                         | 540                      | 21.4               | 11700                    |
| NTA120-31-950  | 350                     |     | 950                         | 570                      | 22.5               | 11400                    |
| NTA120-31-1000 | 400                     |     | 1000                        | 600                      | 23.7               | 11000                    |
| NTA120-31-1100 |                         | 150 | 1100                        | 660                      | 26.1               | 10800                    |
| NTA120-31-1200 |                         | 200 | 1200                        | 720                      | 28.5               | 10300                    |
| NTA120-31-1300 |                         | 250 | 1300                        | 780                      | 30.8               | 9800                     |
| NTA120-31-1400 |                         | 300 | 1400                        | 840                      | 33.2               | 9300                     |
| NTA120-31-1500 |                         | 350 | 1500                        | 900                      | 35.6               | 8700                     |
| NTA120-31-1600 |                         | 400 | 1600                        | 960                      | 38.0               | 8100                     |
| NTA120-31-1700 |                         | 450 | 1700                        | 1020                     | 40.3               | 7400                     |
| NTA120-31-1800 |                         | 500 | 1800                        | 1080                     | 42.7               | 6700                     |
| NTA120-31-1900 |                         | 550 | 1900                        | 1140                     | 45.1               | 5700                     |
| NTA120-31-2000 |                         | 600 | 2000                        | 1200                     | 47.5               | 4700                     |
| NTA120-31-2100 |                         | 650 | 2100                        | 1260                     | 49.4               | 3700                     |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.

# PART EXTENSION

## NTA150-35

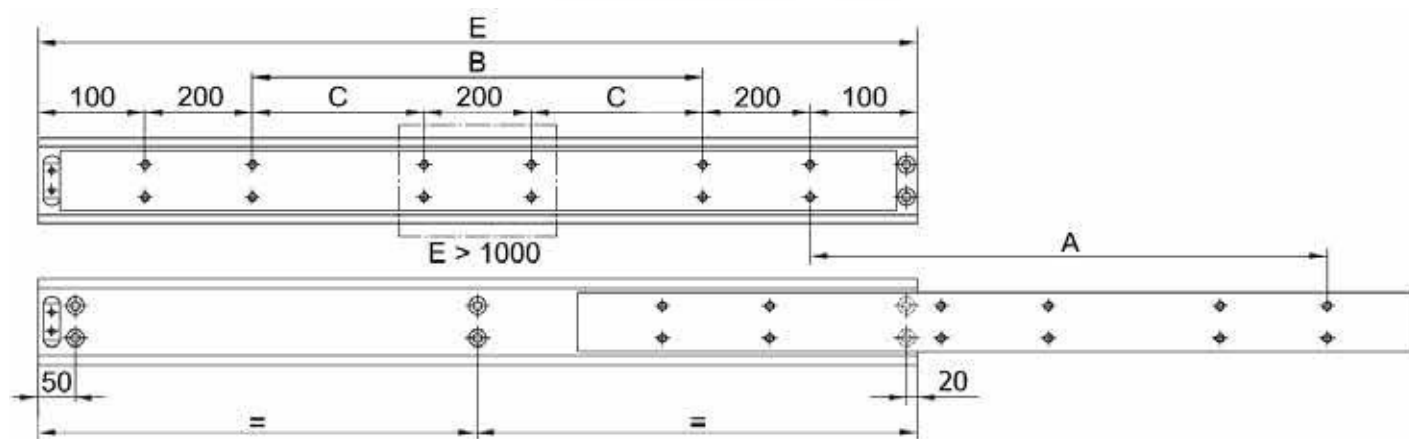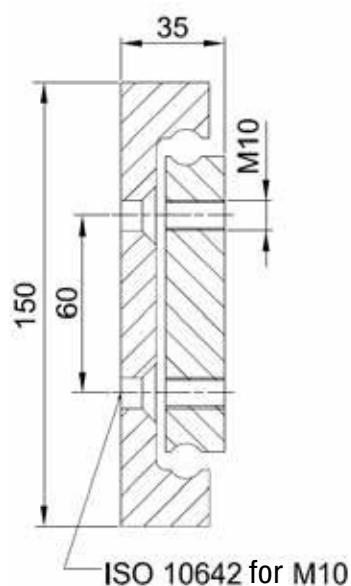

Load Table

| Order Number   | Hole separation (mm) |     | Installation length (mm) | Extension length (mm) | Net weight (kg) | Maximum load/pair (N) |
|----------------|----------------------|-----|--------------------------|-----------------------|-----------------|-----------------------|
|                | B                    | C   | E                        | A                     |                 |                       |
| NTA150-35-700  | 100                  |     | 700                      | 420                   | 24.2            | 14500                 |
| NTA150-35-750  | 150                  |     | 750                      | 450                   | 25.9            | 15000                 |
| NTA150-35-800  | 200                  |     | 800                      | 480                   | 27.7            | 15500                 |
| NTA150-35-850  | 250                  |     | 850                      | 510                   | 29.4            | 15500                 |
| NTA150-35-900  | 300                  |     | 900                      | 540                   | 31.1            | 15000                 |
| NTA150-35-950  | 350                  |     | 950                      | 570                   | 32.9            | 14750                 |
| NTA150-35-1000 | 400                  |     | 1000                     | 600                   | 34.6            | 14500                 |
| NTA150-35-1100 |                      | 150 | 1100                     | 660                   | 38.0            | 14100                 |
| NTA150-35-1200 |                      | 200 | 1200                     | 720                   | 41.5            | 13300                 |
| NTA150-35-1300 |                      | 250 | 1300                     | 780                   | 45.0            | 12500                 |
| NTA150-35-1400 |                      | 300 | 1400                     | 840                   | 48.4            | 11700                 |
| NTA150-35-1500 |                      | 350 | 1500                     | 900                   | 51.9            | 10900                 |
| NTA150-35-1600 |                      | 400 | 1600                     | 960                   | 55.3            | 10000                 |
| NTA150-35-1700 |                      | 450 | 1700                     | 1020                  | 58.8            | 9100                  |
| NTA150-35-1800 |                      | 500 | 1800                     | 1080                  | 62.3            | 8200                  |
| NTA150-35-1900 |                      | 550 | 1900                     | 1140                  | 65.7            | 7300                  |
| NTA150-35-2000 |                      | 600 | 2000                     | 1200                  | 69.1            | 6400                  |
| NTA150-35-2100 |                      | 650 | 2100                     | 1260                  | 71.9            | 5500                  |
| NTA150-35-2200 |                      | 700 | 2200                     | 1320                  | 75.3            | 4500                  |

Ordercode and further options see last page. Your desired length is not listed in the table? No problem! Only the most common lengths are shown here. Please contact our application technology division.